

CITY OF CORAL GABLES PUMP STATION D FORCE MAIN REPLACEMENT IFB 2015.03.05



CLIENT

City of Coral Gables
405 Biltmore Way
Coral Gables, FL 33134
Jose Saucedo
jsaucedo@coralgables.com
Tel. (305) 460-5102

ENGINEER

Hazen and Sawyer
999 Ponce De Leon, Suite 1150
Coral Gables, FL 33134
Josenrique Cueto, P.E.
Tel. 305-443-4001

PROJECT START/COMPLETION

June 2015 – January 2016

INITIAL / FINAL COST


\$682,150.00 / \$613,267.32

KEY STAFF

Javier Garzon, Principal-In-Charge
Raidel Perez, Superintendent
Alphonso Brown, MOT
Fred Ward, Safety Manager

Project Description

The work comprised of the installation of approximately 4,200 linear feet of 12-inch PVC force main for this new segment of force main which runs west and north from Pump Station D along Santurce and Tibidabo Avenues before tying into a 20-inch PVC force main at the intersection of SW 76th Street and Ponce De Leon. The project included trench restoration and milling and resurfacing for the pavement repairs.

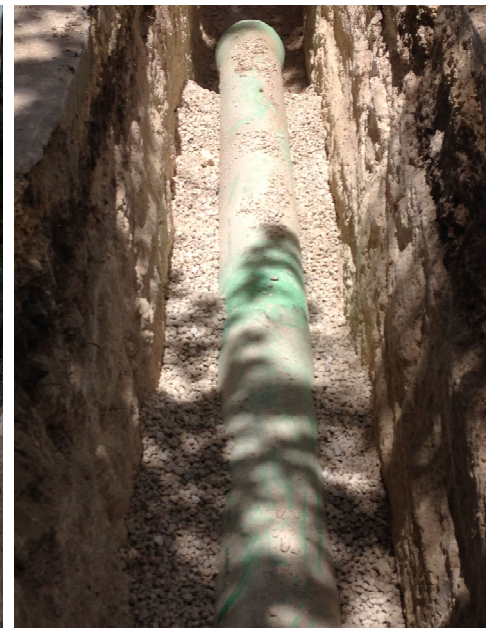

RPU

GENERAL & ENGINEERING
CONTRACTORS