
# MIAMI-DADE WATER & SEWER DEPARTMENT FURNISH AND INSTALL 10-INCH DI FORCE MAIN ON NW 112<sup>TH</sup> AVENUE FROM WEST FLAGLER TO PS 0419 (NW 2<sup>ND</sup> TERRACE) – T-2106



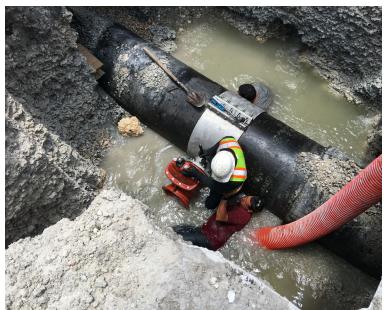

### **CLIENT**

Miami Dade Water & Sewer Dept. 3071 SW 38 Ave, Miami, FL 33146 Alexis Valdez Tel. (786) 268-5126 Email – alexis.valdez@miamidade.gov

## **ENGINEER**

Miami Dade Water & Sewer Dept. 3575 S. LeJeune Road, Miami, FL 33134 Victor Fernandez Cuervo, P.E. Victor.Fernandez-Cuervo@miamidade.gov Tel. (786) 268-5250

# PROJECT START/COMPLETION

March 2016 to September 2016

# INTIAL / FINAL COST \$367,599.32 / \$285,161.97

# **KEY STAFF**

Javier Garzon, Principal-In-Charge Raidel Perez, Superintendent Alphonso Brown, MOT Fred Ward, Safety Manager



# **Project Description**

The Project consists of furnishing and installing approximately 980 linear feet of 10-inch ductile iron pipe and fittings for a sanitary sewage force main; three (3) plug valves, making one (1) tapping connection including installing a tapping sleeve and valve; making two (2) connections to existing sanitary sewage force mains including 9-inch ductile iron pipe and fittings for a sanitary sewage force main; cutting and capping existing sanitary sewer force main at three (3) locations and abandoning (in Place) existing sanitary sewer force mains; constructing automatic air release valve assemblies; installation and restoration of pedestrian curb ramps; installation of curb ramp detectable warning surface; temporary and permanent replacement of any pavement and pavement markings damage by construction.



